

# AR Line SPOT 500 - 1000

## AR Line SPOT 500

### CARATTERISTICHE TECNICHE

- Operatività da 2.5mt a 12mt
- Doppia vite di regolazione focus ant/post
- Sportello basculante inferiore per cambio lampada
- Portafiltri incluso
- Certificazione CE

### DATI MECCANICI

- Estruso in alluminio e lamiera
- Vernice nera epossidica
- Forcella reversibile
- Dimensioni 310x245x335mm
- Peso: 3.8Kg lente PC - 3.6 Kg lente Fresnel

### DATI TECNICI

- Alimentazione: 230V 50/60Hz
- Lampada 500W
- Portalampada GY9.5
- Lente PC o Fresnel Ø120mm
- PC anti-alo zoom 7° - 52° - Fresnel zoom 9° - 46°

### CODICE D'ORDINE

- SG 50F versione Fresnel
- SG 50PC versione PC
- SG BR50 paraluce 4 alette (non inclus)
- SG TL50 telaio portafiltri (incluso)
- PLLP50M40 lampada (non inclusa)



SG 50F  
SG 50PC

SG 100F  
SG 100PC

## AR Line SPOT 500

### FEATURES

- Suitable from 2.5mt to 12mt distance
- Screw focus adjustment, front and rear control
- Hinged base to easy access to the lamp
- Filter frame included
- Complies to CE standards

### MECHANICAL DATA

- Extruded aluminium and steel
- Black epoxy powder paint
- Reverse yoke for stand-moulding
- Dimension: 310x245x335mm
- Weight: 3.8 Kg PC lens - 3.6 Kg Fresnel lens

### TECNICAL DATA

- Power supply: 230V 50/60Hz
- Maximum load 500W
- Socket GY9.5
- Pc or Fresnel lens Ø120mm
- PC anti-alo zoom 7° - 52° - Fresnel zoom 9° - 46°

### ORDER CODE

- SG 50F (Fresnel version)
- SG 50PC (PC version)
- SG BR50 barn door (not included)
- SG TL50 gel frame (included)
- PLLP50M40 lamp (not included)

## AR Line SPOT 1000

### CARATTERISTICHE TECNICHE

- Operatività da 2.5mt a 18mt
- Doppia vite di regolazione focus ant/post
- Sportello basculante inferiore per cambio lampada
- Portafiltri incluso
- Certificazione CE

### DATI MEC CANICI



- Estruso in alluminio e lamiera
- Vernice nera epossidica
- Forcella reversibile
- Dimensioni 370x260x370mm
- Peso: 6.7 Kg lente PC - 6.3 Kg lente Fresnel

### DATI TECNICI

- Alimentazione: 230V 50/60Hz
- Lampada 1000W
- Portalampada GX9.5
- Lente PC o Fresnel Ø150mm
- PC anti-alo zoom 8° - 48° - Fresnel zoom 9° - 45°

### CODICE D'ORDINE

- SG 100F versione Fresnel
- SG 100PC versione PC
- SG BR100 paraluce 4 alette (non incluso)
- SG TL100 telaio portafiltri (incluso)
- PLLP1000T19 lampada (non inclusa)

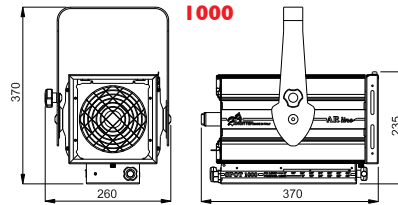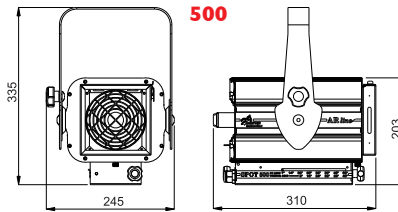

## AR Line SPOT 1000

### FEATURES

- Suitable from 2.5mt to 18mt distance
- Screw focus adjustment, front and rear control
- Hinged base to easy access to the lamp
- Filter frame included
- Complies to CE standards

### MECHANICAL DATA

- Extruded aluminium and steel
- Black standard epoxy powder paint
- Reverse yoke for stand-moulding
- Dimensions: 370x260x370mm
- Weight: 6.7 Kg PC lens - 6.3 Kg Fresnel lens


### TECNICAL DATA

- Power supply: 230V 50/60Hz
- Maximum load 1000W
- Socket GX9.5
- Pc or Fresnel lens Ø150mm
- PC anti-alo zoom 8° - 48° - Fresnel zoom 9° - 45°


### ORDER CODE

- SG 100F (Fresnel version)
- SG 100PC (PC version)
- SG BR100 barn door (not included)
- SG TL100 gel frame (included)
- PLLP1000T19 lamp (not included)


### PC 500

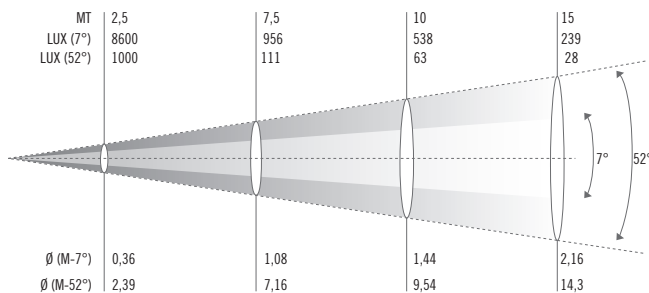

### Fresnel 500

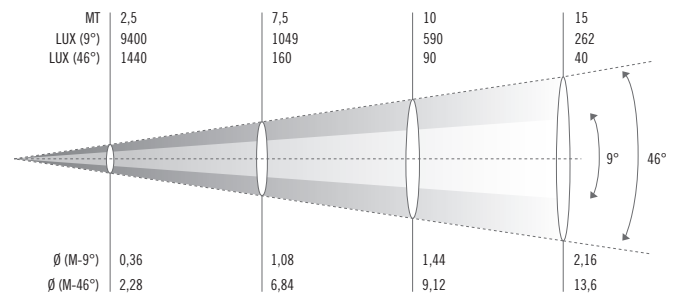

### PC 1000

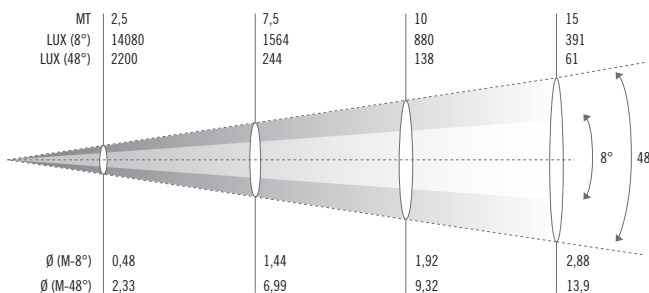

### Fresnel 1000

