

FREE SERIES

S O U N D
HAS NO ADDRESS

FREETWO ✓
FREESUB ✓
FREEPRO ✓

PROEL 
SOUNDSYSTEMS

FREE SERIES

S O U N D
HAS NO ADDRESS

The new generation of portable battery-powered PA systems. Three products designed to work simultaneously, each perfect on its own.

REETWOX

FREEPROX



FREESUBX



ALL-IN-ONE BATTERY-POWERED PA SYSTEM

The evolution of FREEONEX. More versatile, more complete, always ready to deliver its best.

FREETWOX is the direct successor to the highly successful FREEONEX, carrying its DNA forward to a new level. An all-in-one battery-powered PA system combining an integrated digital mixer, USB player, and Bluetooth connectivity with Stereo TWS function in a compact, ultra-durable polypropylene cabinet.

The coaxial design pairs a high-definition 1" HF compression driver with a powerful 6.5" LF woofer, delivering balanced, coherent sound with wide audience coverage. The 400W peak Class D amplifier and integrated DSP ensure high-level performance in any setting.



KEY FEATURES

- Coaxial speaker: 6.5" LF woofer + 1" HF compression driver
- 400W peak Class D amplifier with integrated DSP
- 2-channel digital mixer: 2 mono channels + 1 stereo channel
- 2-band EQ and studio-grade digital reverb for mic/instrument inputs
- USB player for MP3 file playback from storage devices
- Bluetooth 5.0 connectivity with TWS: link two FREETWOX units in wireless stereo
- Rechargeable Li-Ion battery: up to 10 hours of runtime
- Polypropylene cabinet with multiple placement positions
- Balanced XLR output for connecting to other devices (including FREEPROX and FREESUBX)
- Weight: 6.5 kg — top handle and pole-mount flange



APPLICATIONS



Musicians, singers, and enthusiasts performing indoors and outdoors



DJs and presenters at events without access to electricity



Portable PA use in commercial, training, and corporate settings



ALL-IN-ONE PERSONAL BATTERY-POWERED PA WITH APP CONTROL

Portable power. Professional sound.

FREEPROX is the all-in-one, battery-powered personal PA system designed for those who won't compromise on sound, even when away from a power outlet. Compact, fully portable, and built for demanding users, it integrates advanced DSP, high-efficiency amplification, premium transducers, and app control in a single system that goes well beyond its size. Its acoustic core is a coaxial speaker with a 1" HF compression driver and 6.5" LF woofer, delivering rich, projected sound with wide coverage. The 3-channel digital mixer, 3-band EQ, and full library of DSP effects (reverb, delay, chorus, and more) power studio-quality performances. The 400W peak Class D amplifier completes the picture. Compared to FREETWOX, FREEPROX adds advanced features such as a color LCD display, USB recording function, and a dedicated iOS/Android app with Bluetooth 5.4 and BLE wireless control.





KEY FEATURES

- Coaxial speaker: 6.5" LF woofer + 1" HF compression driver
- 400W peak Class D amplifier with advanced DSP
- 3-channel digital mixer with 3-band EQ per channel
- Studio-grade effects: reverb, delay, chorus, and more
- Color LCD display with intuitive controls
- Dedicated app for iOS and Android (Bluetooth BLE control)
- USB player/recorder: play back or record directly to a USB drive
- Bluetooth 5.4 with TWS: link two FREEPROX units in wireless stereo
- 3.5mm headphone output + balanced 6.35mm line output
- Rechargeable Li-Ion battery: up to 10 hours of runtime
- Weight: 6.8 kg — top handle and pole-mount flange

APPLICATIONS



Musicians and artists seeking maximum control and audio quality



Performers who need to record their sets on location



Presenters and trainers who want to manage everything via a smartphone app



Professional and semi-professional use in any standalone setting



2X8" BATTERY-POWERED AMPLIFIED SUBWOOFER

The bass you need. Wherever you are.

FREESUBX is the battery-powered amplified subwoofer designed to boost FREE Series systems by adding depth and impact to the low frequencies. With two 8" woofers in a bass-reflex configuration and 300W RMS of amplification (600W peak), FREESUBX turns any FREETWOX or FREEPROX system into a full-range, professional-level rig wherever mains power isn't available.

The integrated DSP offers complete sound control: crossover filter, phase inversion, output mode, and output filter. Bluetooth 5.0 with TWS function enables wireless audio streaming and stereo pairing of two FREESUBX subwoofers. The M20-insert pole flange allows a FREETWOX or FREEPROX to be mounted directly on top of the subwoofer, optimizing sound and minimizing footprint.




KEY FEATURES

- 2 x 8" woofers in a bass-reflex cabinet, 2" voice coil
- Integrated 300W RMS amplifier
- DSP control: VOLUME — OUTPUT MODE — PHASE — X-OVER FILTER — OUTPUT FILTER
- 2 LINE XLR inputs + 2 LINE XLR outputs
- Bluetooth 5.0 with STEREO TWS for wireless audio streaming
- 8000 mAh Li-Ion battery, user-removable and replaceable for extended runtime
- Top carry handle
- Pole-mount flange with M20 insert: supports FREETWOX and FREEPROX
- Designed to pair with FREETWOX, FREEPROX, and any compact battery-powered audio system



APPLICATIONS

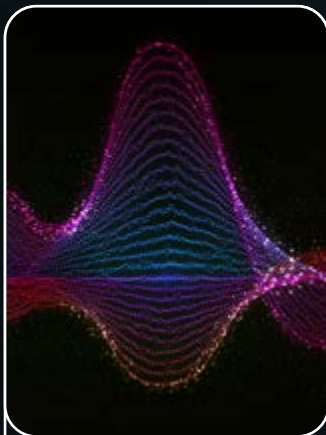

Reinforcing low frequencies at outdoor and indoor events



Completing the FREETWOX or FREEPROX system for a full-range portable rig



DJs, musicians, and event organizers who need powerful bass even without mains power

COMBINED SYSTEMS - MAXIMUM FLEXIBILITY

FREESUBX + FREETWOX

The ideal combination for a complete, full-range, fully self-contained PA system. FREETWOX mounts directly via a telescopic pole (optional) onto FREESUBX's M20 flange, creating an integrated system that covers the entire sound spectrum — from the subwoofer's lowest frequencies to the coaxial speaker's most detailed highs — all without a single power cable.

Thanks to the 2-channel crossover built into FREESUBX, the same pair can also be configured in 2+1 stereo mode: two FREETWOX units, one per channel, paired with a single FREESUBX handling the low frequencies for both. The result is a full-range stereo system with a single bass source — ideal wherever a compact stereo stage setup is needed.

Recommended for: small piazzas, street concerts, outdoor parties and DJ sets, mobile presentations.



STREET
CONCERTS



OUTDOOR
PARTIES AND DJ SET



DEMANDING
PERFORMERS



MUSICIANS AND
STREET ARTISTS



EVENTS AT
LOCATIONS

FREESUBX + FREEPROX

For those who won't sacrifice quality or depth of control. FREEPROX offers an advanced mixer, LCD display, app control, and USB recording; FREESUBX adds the bass that transforms every performance. An unrivaled professional mobile system.

Here too, FREESUBX's built-in 2-channel crossover enables a 2+1 stereo configuration: two FREEPROX units as stereo satellites and a single FREESUBX handling the low frequencies for both channels, for an even more compact and mobility-friendly professional stereo system. Recommended for: demanding performers, musicians, street artists, events at locations without mains power.

FREESUBX + 2 x FREETWOX

For your live performances in a typical stereo setup, each single FREESUBX offers the option of a stereo configuration by pairing with a set of speakers such as the FREETWOX. This is possible thanks to the dual-channel crossover section built into the FREESUBX.

This configuration is recommended for: demanding performers who don't want to give up stereo sound, musicians, and events at medium-sized venues without access to mains power.



DEMANDING
PERFORMERS



MUSICIANS



MEDIUM-SIZED VENUES WITHOUT
ACCESS TO MAINS POWER



	FREETWOX	FREEPROX	FREESUBX
System type	2-way vented enclosure	2-way vented enclosure	Subwoofer Bass-reflex
High Frequency Device	1x 1" compression driver coaxial	1x 1" compression driver coaxial	
Low Frequency Device	1 x 6.5" woofer	1 x 6.5" woofer	
Loudspeaker			2x 8" woofer, 2"VC
Frequency response (-3 dB)	60 Hz – 20 kHz	60 Hz – 20 kHz	40 – 100 / 160 Hz
Max. SPL	114 dB	115 dB	120 Db
Coverage angle (H x V)	90° x 60°	90° x 60°	
Total peak power	400 W	400 W	600 W
HF continuous power	50 W class D	50 W class D	
LF continuous power	150 W class D	150 W class D	
Continuous Power			300 W
Input Connectors	2 x XLR/TRS Combo (balanced) 1 x 6.35mm Jack (balanced) 1 x 3.5mm Jack Stereo 1 x USB-A for PLAYER	2 x XLR/TRS Combo (balanced) 1 x 6.35mm Jack (balanced) 1 x 3.5mm Jack Stereo 1 x USB-A for PLAYER/RE-CORDER	2 x XLR-F (balanced)
Output Connectors	1 x XLR (balanced) 1 x USB-C charge port	1 x 6.35mm Jack (balanced) 1 x 3.5mm Jack Stereo (headphones) 1 x USB-C charge port	2 x XLR-M (Z-balanced)
Input Channels	2x MIC/GUITAR/LINE 1x BT /USB / STEREO LINE / MONO LINE	2x MIC/LINE 1x BT /USB / STEREO LINE / MONO LINE	
Controls	CH1/2 LEVEL, HIGH, LOW, REVERB USB PLAY-PAUSE/NEXT/PREVIOUS Bluetooth PAIR / STEREO LINK	LCD Main DIAL CH1/2/3 DIAL CH1/2 GAIN Headphones level USB PLAY/REC	VOLUME OUTPUT MODE PHASE FILTER OUTPUT FILTER
Processing	DSP	DSP	DSP
Bluetooth	Protocol 5.0, Audio Streaming	Protocol 5.4, Audio Streaming, BLE control	Protocollo 5.0, Streaming Audio
Control APP		Android, Apple	
Enclosure material	Polypropylene	Polypropylene	Polipropilene, MDF
Finish	Black Textured	Black Textured	Black Textured
Grille material	Powder coated steel	Powder coated steel	Powder coated steel
Handles	1 x top	1 x top	1 x top
Mounting Pole	1 x bottom	1 x bottom	1 x side (M20)
Dimensions (H x W x D):	320 mm x 240 mm x 290 mm 12.59 in x 9.45 in x 11.42 in	330 mm x 246 mm x 278 mm 12 in x 9.7 in x 11 in	255 mm x 542 mm x 530 mm 14.2 in x 21.3 in x 20.9 in
Weight	6.5 kg 14.3 lb	6.8 kg 15 lb	23.5 kg 49.6 lb
USB charging	2 A max	2 A max	
Power Supply	100 – 240 V~, 50 / 60 Hz	00 – 240 V~, 50 / 60 Hz	100 – 240 V~, 50 / 60 Hz
Consumption	150 W	75 W	300 W
Battery type	Rechargeable Lithium-ion 6000mAh	Rechargeable Lithium-ion 5200mAh	Rechargeable Lithium-ion 8800mAh
Battery play time (at medium level)	up to 10 hours	up to 10 hours	up to 5 hours
Recharging time	less than 4 hours	less than 4 hours	less than 4 hours



PROEL SPA
(Worldwide Headquarters)
Via alla Ruenia, 37/43
64027 Sant'Omero (TE) - ITALY
Tel. +39 0861 81241
Fax +39 0861 887862
P.I. 00778590679
N.Reg.AEE IT 08020000002762
info@proel.com
www.soundsystems.proel.com

